

S5700-LI Series Gigabit Enterprise Switches



S5700-LI Series Gigabit Enterprise Switches

Product Overview

The S5700-LI is a next-generation energy-saving gigabit Ethernet switch that provides flexible GE access ports and 10GE uplink ports. Building on next-generation, high-performance hardware and the Huawei Versatile Routing Platform (VRP), the S5700-LI supports Advanced Hibernation Management (AHM), intelligent stack (iStack), flexible Ethernet networking, and diversified security control. It provides customers with a green, easy-to-manage, easy-to-expand, and cost-effective gigabit to the desktop solution. In addition, Huawei customizes specialized models to meet customer requirements to suit special scenarios.

Huawei S5700-LI-BAT series battery LAN switches (S5700-LI-BAT for short) are the industry's first switch series to support built-in batteries and provide visualized battery status management. The S5700-LI-BAT can ensure uninterrupted services in environments facing frequent mains power failures at the access layer. Access switches are usually distributed; therefore, it is costly and space-consuming to deploy high-performance Uninterruptible Power Supplies (UPSs) for the access switches. Low-end UPSs or external lead-acid batteries can provide power redundancy at lower costs, but have low reliability and security, short lifespan, and also occupy significant space. Huawei battery LAN switches solve this problem. The use of internal batteries ensures stable operation of the access layer in the event of mains power failures.

CSFP switches support downlink CSFP ports, and each downlink CSFP port provides 2 Gbit/s bandwidth bidirectionally. CSFP switches apply to scenarios where users increase continuously and demand higher bandwidth, and scenarios where deploying fibers is costly and difficult and construction timeframes are long. The switches with front power sockets can be installed in the 300 mm deep cabinet.

The S5701-LI series with front power sockets can be installed in the 300 mm deep cabinet. They can be maintained through the front panel, saving space in small equipment rooms.

Product Appearance

S5700-10P-LI-AC



- 8x10/100/1000Base-T Ethernet ports, 2xGE SFP ports
- AC power supply
- Forwarding performance: 15 Mpps
- Switching Capacity: 256 Gbps

S5700-10P-PWR-LI-AC



- 8x10/100/1000Base-T Ethernet ports, 2xGE SFP ports
- AC power supply
- PoE+
- Forwarding performance: 15 Mpps
- Switching Capacity: 256 Gbps

S5700-28P-LI-AC



- 24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports
- AC power supply, supporting Redundant Power Supply (RPS)
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5700-28X-LI-AC



S5700-28X-LI-DC



- 24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- Two models: AC model and DC model, supporting RPS
- Forwarding performance: 96 Mpps
- Switching Capacity: 256 Gbps

S5700-28X-LI-24S-AC



S5700-28X-LI-24S-DC



- 24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- Two models: AC model and DC model, supporting RPS
- Forwarding performance: 96 Mpps
- Switching Capacity: 256 Gbps

S5700-28P-PWR-LI-AC



- 24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports
- Ac power supply, supporting RPS
- PoE+
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5700-28X-PWR-LI-AC



- 24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- Ac power supply, supporting RPS
- PoE+
- Forwarding performance: 96 Mpps
- Switching Capacity: 256 Gbps

S5700-52P-LI-AC



- 48x10/100/1000Base-T Ethernet ports, 4xGE SFP ports
- AC power supply, supporting RPS
- Forwarding performance: 78 Mpps
- Switching Capacity: 256 Gbps

S5700-52X-LI-AC



- 48x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- AC Power supply, supporting RPS
- Forwarding performance: 132 Mpps
- Switching Capacity: 256 Gbps

S5700-52X-PWR-LI-AC



- 48x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- AC power supply, supporting RPS
- PoE+
- Forwarding performance: 132 Mpps
- Switching Capacity: 256 Gbps

S5700-52P-PWR-LI-AC



- 48x10/100/1000Base-T Ethernet ports, 4xGE SFP ports
- AC power supply, supporting RPS
- PoE+
- Forwarding performance: 78 Mpps
- Switching Capacity: 256 Gbps

S5700-28P-LI-BAT



- 24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports
- AC power supply
- One battery slot for an internal 4AH lithium battery or external lead-acid battery used in the event of a mains power failure or a 150 W AC or DC power module used as the redundant power source
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5700-28P-LI-24S-BAT



- 28xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports
- AC power supply
- One battery slot for an internal 4AH lithium battery or external lead-acid battery used in the event of a mains power failure or a 150 W AC or DC power module used as the redundant power source
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5700-52X-LI-48CS-AC



- 48xGE CSFP ports or 24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- AC power supply, front power sockets, front access
- Forwarding performance: 132 Mpps
- Switching Capacity: 256 Gbps

S5701-28X-LI-AC



- 24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- AC power supply, front power sockets, front access
- Forwarding performance: 96 Mpps
- Switching Capacity: 256 Gbps

S5701-28X-LI-24S-AC



- 24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports
- AC power supply, front power sockets, front access
- Forwarding performance: 96 Mpps
- Switching Capacity: 256 Gbps

S5700-28TP-LI-AC



- 24 x10/100/1000Base-T Ethernet ports, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP
- AC power supply, supporting RPS
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5700-28TP-PWR-LI-AC



- 24 x10/100/1000Base-T Ethernet ports, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP
- AC power supply, supporting RPS
- PoE+
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

S5701-28TP-PWR-LI-AC



- 12 x10/100/1000Base-T Ethernet PoE+ ports, 12 x10/100/1000Base-T Ethernet ports
- 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP
- AC power supply, supporting RPS
- Forwarding performance: 42 Mpps
- Switching Capacity: 256 Gbps

Product Features and Highlights

Innovative Energy Saving Design

- The S5700-LI series smart energy-saving switches reduce power consumption without degrading system performance or user experience. The S5700-LI series uses innovative energy-saving technologies including energy efficient Ethernet (EEE), port power detection, dynamic CPU frequency adjustment, and device sleep mode. These technologies help reduce power consumption by adjusting power depending on the Up/Down states of links, presence/absence of optical modules, shutdown and undo shutdown operations on ports, and peak and off-peak hours. The S5700-LI series is the industry's first switch series that supports device sleep mode, and provides three energy saving modes to adapt to different usage scenarios: standard, basic, and deep modes.

Flexible Ethernet networking

- In addition to traditional Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP), the S5700-LI supports Huawei-developed Smart Ethernet Protection (SEP) technology and the latest Ethernet Ring Protection Switching (ERPS) standard. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching. ERPS is defined in ITU-T G.8032. It implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.
- The S5700-LI supports Smartlink, which implements backup of uplinks. One S5700-LI switch can connect to multiple aggregation switches through multiple links, significantly improving reliability of access devices.
- The S5700-LI supports Ethernet OAM (IEEE 802.3ah/802.1ag) to fast-detect link faults.
- S5700-10P-LI supports IPv4 static routing and Layer3 hardware forwarding.

Diversified security control

- The S5700-LI supports 802.1x authentication, MAC address authentication, and combined authentication on a per port basis, as well as Portal authentication on a per VLANIF interface basis, and implements dynamic policy delivery (VLAN, QoS, and ACL) to users.
- The S5700-LI provides a series of mechanisms to defend against DoS attacks and user-targeted attacks. DoS attacks are targeted at switches and include SYN flood, Land, Smurf, and ICMP flood attacks. User-targeted attacks include bogus DHCP server attacks, IP/MAC address spoofing, DHCP request flood, and changing of the DHCP CHADDR value.
- The S5700-LI collects and maintains information about access users, such as IP addresses, MAC addresses, IP address leases, VLAN IDs, and interface numbers in a DHCP snooping binding table. In this way, IP addresses and access interfaces of DHCP users can be tracked. You can specify DHCP snooping trusted and untrusted ports to ensure that users connect only to the authorized DHCP server.
- The S5700-LI supports strict ARP learning. This feature prevents ARP spoofing attackers from exhausting ARP entries so that users can connect to the Internet normally.

Easy operation and maintenance

- The S5700-LI supports Huawei Easy Operation, a solution that provides zero-touch deployment, replacement of faulty devices without additional configuration, USB-based deployment, batch configuration, and batch remote upgrade. The Easy Operation solution facilitates device deployment, upgrade, service provisioning, and other management and maintenance operations, and also greatly reduces costs of operation and maintenance. The S5700-LI can be managed and maintained using Simple Network Management Protocol (SNMP) v1, v2c, and v3, Command Line Interface (CLI), web-based network management system, or Secure Shell (SSH) V2.0. Additionally, it supports remote network monitoring (RMON), multiple log hosts, port traffic statistics collection, and network quality analysis that helps with network consolidation and reconstruction.

- EasyDeploy: The Commander collects information about the topology of the client connecting to the Commander and saves client startup information based on the topology. The client can be replaced without configuration. Configuration and scripts can be delivered to the client in batches. In addition, the configuration delivery result can be queried. The Commander can collect and display power consumption on the entire network.
- The S5700-LI can use the GARP VLAN Registration Protocol (GVRP) to implement dynamic distribution, registration, and propagation of VLAN attributes. GVRP reduces manual configuration workload and ensures correct configuration. Additionally, the S5700-LI supports MUX VLAN, which involves a principal VLAN and multiple subordinate VLANs. Subordinate VLANs are classified into group VLANs and separate VLANs. Ports in the principal VLAN can communicate with ports in subordinate VLANs. Ports in a subordinate group VLAN can communicate with each other, whereas ports in a subordinate separate VLAN can communicate only with ports in the principal VLAN. The S5700-LI also supports VLAN Central Management Protocol (VCMP) and VLAN-Based Spanning Tree (VBST) protocol.

iStack

- The S5700-LI supports intelligent stack (iStack). This technology combines multiple switches into a logical switch. Member switches in a stack implement redundancy backup to improve device reliability and use inter-device link aggregation to improve link reliability. iStack provides high network scalability. You can increase ports, bandwidth, and processing capacity of a stack by simply adding member switches to the stack. iStack also simplifies device configuration and management. After a stack is set up, multiple physical switches are virtualized into one logical device. You can log in to any member switch in the stack to manage all the member switches in the stack.
- The iStack stacking architecture is designed for rapid failover capability with n-1 master redundancy, distributed Layer 2 and Layer 3 switching, link aggregation across the stack, and within 200 millisecond failover for path failure and hitless master/backup failover.

Excellent network traffic analysis

- The S5700-LI supports the sFlow function. It uses a method defined in the sFlow standard to sample traffic passing through it and sends sampled traffic to the collector in real time. The collected traffic statistics are used to generate statistical reports, helping enterprises maintain their networks.

Innovative built-in battery

- The S5700-LI-BAT is the industry's first switch model that supports internal lithium batteries as a backup power supply. It ensures uninterrupted services in situations where power failures frequently occur at the access layer. The S5700-LI-BAT has the following advantages:
 - In the event of a mains power failure the battery can power the switch, so services will not be interrupted.

- Compared with switches using external power supply units, the S5700-LI-BAT occupies less space and is easier to install.
- Intelligent power management, long standby time
- Battery LAN switches on the entire network can be managed centrally using a web system, facilitating network operation and maintenance. As the battery lifetime is predictable, you do not need to replace batteries periodically, reducing hardware costs.
- The internal battery provides alarm and voltage/current protection functions as well as overtemperature protection, which enhance reliability.

CSFP providing high-density access and increased bandwidth

- CSFP switches support downlink CSFP ports. Each downlink CSFP port equipped with a CSFP GE optical module and one pair of fibers can provide 2 Gbit/s bandwidth bidirectionally, which is two times the bandwidth of standard SFP optical modules. The 24 downlink CSFP ports can provide 48 Gbit/s bandwidth bidirectionally, implementing high-density access (equal to access of 48 standard SFP ports) and saving the cost of deploying fibers and adding optical modules.

Easy O&M with front panel

- The models with front power sockets can be installed in a 300 mm deep cabinet, and can be maintained through the front panel. This simplifies operation and maintenance. The cabinets can be placed against the wall or back to back, and is well-suited for shallow cabinets and limited equipment room space.



Product Specifications

Item	S5700-10P-LI-AC S5700-10P-PWR-LI-AC S5700-28X-LI-24S S5701-28X-LI-24S-AC	S5700-28P-LI-AC S5700-28P-PWR-LI S5700-28X-LI* S5700-28X-PWR-LI-AC S5701-28X-LI-AC S5700-28TP-LI-AC S5700-28TP-PWR-LI-AC S5701-28TP-PWR-LI-AC	S5700-52P-LI-AC S5700-52P-PWR-LI S5700-52X-LI-AC S5700-52X-PWR-LI-AC	S5700-28P-LI-BAT S5700-28P-LI-24S-BAT	S5700-52X-LI-48CS-AC
Fixed ports	<p>S5700-10P-LI-AC/S5700-10P-PWR-LI-AC: 8x10/100/1000Base-T Ethernet ports, 2xGE SFP ports</p> <p>S5700-28P-LI-AC/S5700-28P-PWR-LI/ S5700-28P-LI-BAT: 24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports</p> <p>S5700-52P-LI-AC/S5700-52P-PWR-LI: 48x10/100/1000Base-T Ethernet ports, 4xGE SFP ports</p> <p>S5700-28X-LI*/S5700-28X-PWR-LI-AC/ S5701-28X-LI-AC: 24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ port</p> <p>S5700-52X-LI-AC/S5700-52X-PWR-LI-AC: 48x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ port</p> <p>S5700-28X-LI-24S/ S5701-28X-LI-24S-AC: 24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports</p> <p>S5700-28P-LI-24S-BAT: 28xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports</p> <p>S5700-52X-LI-48CS-AC: 48xGE CSFP ports or 24xGE SFP ports, 4x Combo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports</p> <p>S5700-28TP-LI-AC/S5700-28TP-PWR-LI-AC/S5701-28TP-PWR-LI-AC: 24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, 2xCombo 10/100/1000Base-T Ethernet ports</p>				
MAC address table	<p>MAC address learning and aging</p> <p>Static, dynamic, and blackhole MAC address entries</p> <p>Packet filtering based on source MAC addresses</p> <p>Interface-based MAC learning limiting</p> <p>16K MAC address entries</p>				
VLAN features	<p>4K VLANs</p> <p>Guest VLAN and voice VLAN</p> <p>GVRP</p> <p>MUX VLAN</p> <p>VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and interfaces</p> <p>1:1 and N:1 VLAN mapping</p>				
Jumbo frame	10K				

Item	S5700-10P-LI-AC S5700-10P-PWR-LI-AC S5700-28X-LI-24S S5701-28X-LI-24S-AC	S5700-28P-LI-AC S5700-28P-PWR-LI S5700-28X-LI* S5700-28X-PWR-LI-AC S5701-28X-LI-AC S5700-28TP-LI-AC S5700-28TP-PWR-LI-AC S5701-28TP-PWR-LI-AC	S5700-52P-LI-AC S5700-52P-PWR-LI S5700-52X-LI-AC S5700-52X-PWR-LI-AC	S5700-28P-LI-BAT S5700-28P-LI-24S-BAT	S5700-52X-LI-48CS-AC
Reliability	RRPP ring topology and RRPP multi-instance Smart Link tree topology and Smart Link multi-instance, providing millisecond-level protection switchover SEP ERPS (G.8032) STP(IEEE 802.1d), RSTP(IEEE 802.1w), and MSTP(IEEE 802.1s) BPDU protection, root protection, and loop protection BPDU tunnel				
IP routing	Static route, RIP, RIPng (S5700-10P-LI-AC/S5700-10P-PWR-LI-AC do not support RIPng)				
IPv6 features	Neighbor Discovery (ND) Path MTU (PMTU) IPv6 ping, IPv6 tracer, and IPv6 Telnet ACLs based on the source IPv6 address, destination IPv6 address, Layer 4 ports, and protocol type MLDv1/v2 snooping				
Multicast	IGMPv1/v2/v3 snooping and IGMP fast leave Multicast forwarding in a VLAN and multicast replication between VLANs Multicast load balancing among member ports of a trunk Controllable multicast Interface-based multicast traffic statistics				
QoS/ACL	Rate limiting on packets sent and received by an interface Packet redirection Interface-based traffic policing and two-rate and three-color CAR Eight queues on each interface WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms Re-marking of the 802.1p priority and DSCP priority Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN ID Rate limiting in each queue and traffic shaping on interfaces				

Item	S5700-10P-LI-AC S5700-10P-PWR-LI-AC S5700-28X-LI-24S S5701-28X-LI-24S-AC	S5700-28P-LI-AC S5700-28P-PWR-LI S5700-28X-LI* S5700-28X-PWR-LI-AC S5701-28X-LI-AC S5700-28TP-LI-AC S5700-28TP-PWR-LI-AC S5701-28TP-PWR-LI-AC	S5700-52P-LI-AC S5700-52P-PWR-LI S5700-52X-LI-AC S5700-52X-PWR-LI-AC	S5700-28P-LI-BAT S5700-28P-LI-24S-BAT	S5700-52X-LI-48CS-AC
Security	<p>Hierarchical user management and password protection</p> <p>DoS attack defense, ARP attack defense, and ICMP attack defense</p> <p>Binding of the IP address, MAC address, interface number, and VLAN ID</p> <p>Port isolation, port security, and sticky MAC</p> <p>MFF</p> <p>Blackhole MAC address entries</p> <p>Limit on the number of learned MAC addresses</p> <p>IEEE 802.1x authentication and limit on the number of users on an interface</p> <p>AAA authentication, RADIUS authentication, HWTACACS+ authentication, and NAC</p> <p>SSH V2.0</p> <p>Hypertext Transfer Protocol Secure (HTTPS)</p> <p>CPU defense</p> <p>Blacklist and whitelist</p>				
Access Security	DHCP relay, DHCP server, DHCP snooping, and DHCP security				
Lightning protection	Service interface: 6 kV				
Super Virtual Fabric (SVF)	<p>Working as an SVF client that is plug-and-play with zero configuration</p> <p>Automatically loading the system software package and patches of clients</p> <p>One-click and automatic delivery of service configurations</p> <p>Supports independent running client</p>				
Management and maintenance	<p>iStack(excluding S5700-10P-LI-AC, S5700-10P-PWR-LI-AC, S5700S-28P-LI-AC, S5700S-52P-LI-AC and battery LAN switches)</p> <p>Virtual Cable Test (VCT)</p> <p>Remote configuration and maintenance using Telnet</p> <p>SNMP v1/v2c/v3</p> <p>RMON</p> <p>eSight and web-based NMS</p> <p>HTTPS</p> <p>LLDP/LLDP-MED</p> <p>System logs and multi-level alarms</p> <p>802.3az EEE</p> <p>Dying Gasp (excluding battery LAN switches)</p> <p>Device hibernation mode (excluding PWR serials switches, battery LAN switches, S5700-10P-LI, S5700-28X-LI-24S, S5701-28X-LI-24S-AC and S5700-52X-LI-48CS-AC)</p>				

Item	S5700-10P-LI-AC S5700-10P-PWR-LI-AC S5700-28X-LI-24S S5701-28X-LI-24S-AC	S5700-28P-LI-AC S5700-28P-PWR-LI S5700-28X-LI* S5700-28X-PWR-LI-AC S5701-28X-LI-AC S5700-28TP-LI-AC S5700-28TP-PWR-LI-AC S5701-28TP-PWR-LI-AC	S5700-52P-LI-AC S5700-52P-PWR-LI S5700-52X-LI-AC S5700-52X-PWR-LI-AC	S5700-28P-LI-BAT S5700-28P-LI-24S-BAT	S5700-52X-LI-48CS-AC
Interoperability	Supports VBST (Compatible with PVST/PVST+/RPVST)				
	Supports LNP (Similar to DTP)				
	Supports VCMP (Similar to VTP)				
Operating environment	Long-term operating temperature: 0°C to 45°C Relative humidity: 5% to 95% (non-condensing)	Long-term operating temperature: 0°C to 50°C Relative humidity: 5% to 95% (non-condensing)	Long-term operating temperature: 0°C to 45°C Relative humidity: 5% to 95% (non-condensing)		
Input voltage	AC: Rated voltage range: 100 V to 240 V AC, 50/60 Hz Maximum voltage range: 90 V to 264 V AC, 47/63 Hz DC: Rated voltage range: -48 V to -60 V, DC Maximum voltage range: -36 V to -72 V, DC Note: Models supporting PoE do not use DC power supplies.				
Power socket position	S5700-10P-LI-AC/S5700-10P-PWR-LI-AC/ S5700-28P-LI-AC/S5700-28P-PWR-LI/S5700-28X-LI/S5700-28X-PWR-LI-AC/S5700-28X-LI-24S /S5700-52P-LI-AC/S5700-52P-PWR-LI/S5700-52X-LI-AC/S5700-52X-PWR-LI-AC/S5700-28P-LI-BAT/S5700-28P-LI-24S-BAT /S5700-28TP-LI-AC/S5700-28TP-PWR-LI-AC /S5701-28TP-PWR-LI-AC: rear power socket S5701-28X-LI-24S-AC /S5701-28X-LI-AC/S5700-52X-LI-48CS-AC: front power sockets				
Battery	One slot for lithium battery or lead-acid battery charger module (supported by battery LAN switches) ^{Note}				
Battery type	Internal BAT-4AHA lithium batteries and external lead-acid batteries connected to the lead-acid battery charger module in the battery slot (supported by battery LAN switches)				
Battery management	Web-based management system used to check the battery status and manage the battery (supported by battery LAN switches)				

Item	S5700-10P-LI-AC S5700-10P-PWR-LI-AC S5700-28X-LI-24S S5701-28X-LI-24S-AC	S5700-28P-LI-AC S5700-28P-PWR-LI S5700-28X-LI* S5700-28X-PWR-LI-AC S5701-28X-LI-AC S5700-28TP-LI-AC S5700-28TP-PWR-LI-AC S5701-28TP-PWR-LI-AC	S5700-52P-LI-AC S5700-52P-PWR-LI S5700-52X-LI-AC S5700-52X-PWR-LI-AC	S5700-28P-LI-BAT S5700-28P-LI-24S-BAT	S5700-52X-LI-48CS-AC
Dimensions (W x D x H)	S5700-10P-LI-AC: 250 mm x 180 mm x 43.6 mm S5700-10P-PWR-LI-AC: 320 mm x 220 mm x 43.6 mm S5700-28P-LI-AC/S5700-28X-LI-AC/S5700-28X-LI-DC/S5700-28X-LI-24S-AC/S5700-28X-LI-24S-DC/S5701-28X-LI-AC/S5701-28X-LI-24S-AC/S5700-52X-LI-48CS-AC/ S5700-28TP-LI-AC: 442 mm x 220 mm x 43.6 mm S5700-28P-PWR-LI/S5700-52P-LI-AC/S5700-52P-PWR-LI/S5700-28X-PWR-LI-AC/S5700-52X-LI-AC/S5700-52X-PWR-LI-AC/S5700-28P-LI-BAT/S5700-28P-LI-24S-BAT/S5700-28TP-PWR-LI-AC/S5701-28TP-PWR-LI-AC: 442 mm x 310 mm x 43.6 mm				
Power consumption	S5700-10P-LI-AC <11.5W; S5700-10P-PWR-LI-AC <142.4W (PoE:124W); S5700-28X-LI-24S-AC<60W; S5700-28X-LI-24S-DC <57W; S5701-28X-LI-24S-AC<60W;	S5700-28P-LI-AC < 24 W S5700-28P-PWR-LI < 436.5 W (PoE: 370 W) S5700-28X-LI-AC < 41W S5700-28X-LI-DC < 42 W S5700-28X-PWR-LI-AC < 448.8 W(PoE: 370 W) S5701-28X-LI-AC < 39.5 W S5700-28TP-LI-AC<26.4W; S5700-28TP-PWR-LI-AC<469.7W(PoE: 370W); S5701-28TP-PWR-LI-AC<238.7W(PoE: 185W)	S5700-52P-LI-AC <48.4 W S5700-52P-PWR-LI <464.5 W (PoE: 370 W) S5700-52X-LI-AC < 61 W S5700-52X-PWR-LI-AC < 479.3 W(PoE: 370 W)	S5700-28P-LI-BAT < 23W S5700-28P-LI-24S-BAT < 34.1W	S5700-52X-LI-48CS-AC < 79.9W


Note

S5700-28X-LI is short for S5700-28X-LI-AC and S5700-28X-LI-DC. As product versions are irrelevant to the power supply mode, the product names mentioned in product specifications do not contain AC or DC. This rule also applies to other product models.


For details about specifications of battery LAN switches, see Huawei S5700-LI-BAT Battery LAN Switch Datasheet.

Applications

The S5700-LI provides 1000M desktop access functions for a high performance network, such as voice VLAN, NAC and so on.

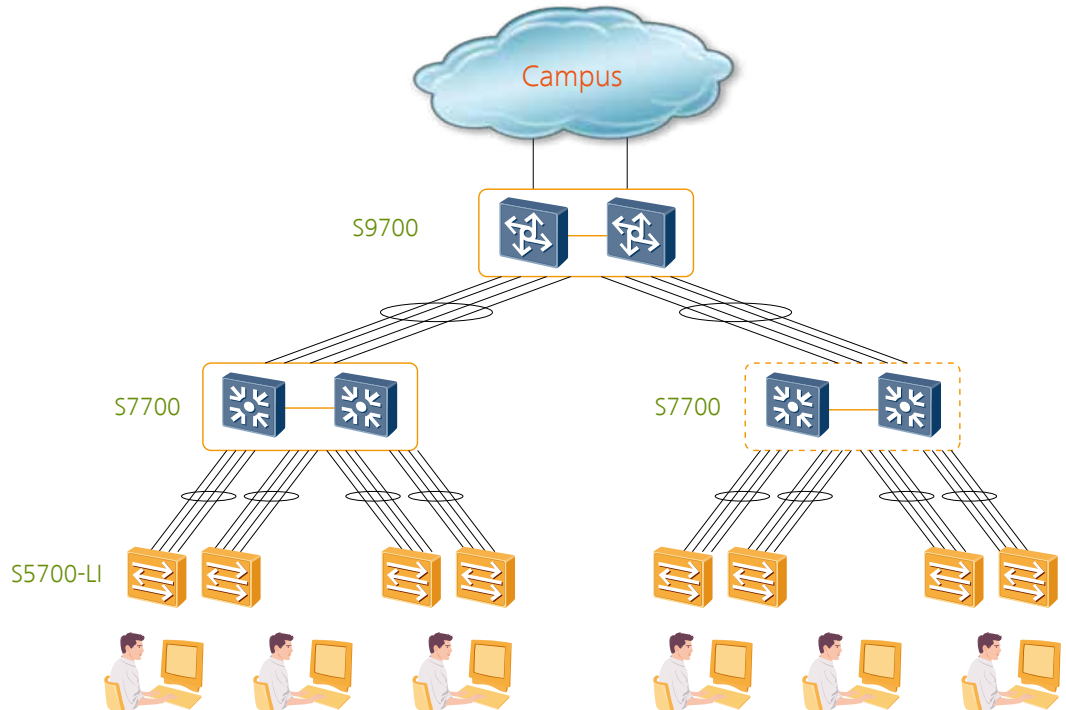

The S5700-LI-BAT uses an internal lithium battery as the backup power supply. When a mains power failure occurs, the lithium battery begins powering the switch. When the mains power supply recovers, the switch automatically charges the lithium battery. The use of internal batteries ensures high reliability at the access layer in the case of frequent mains power failures.

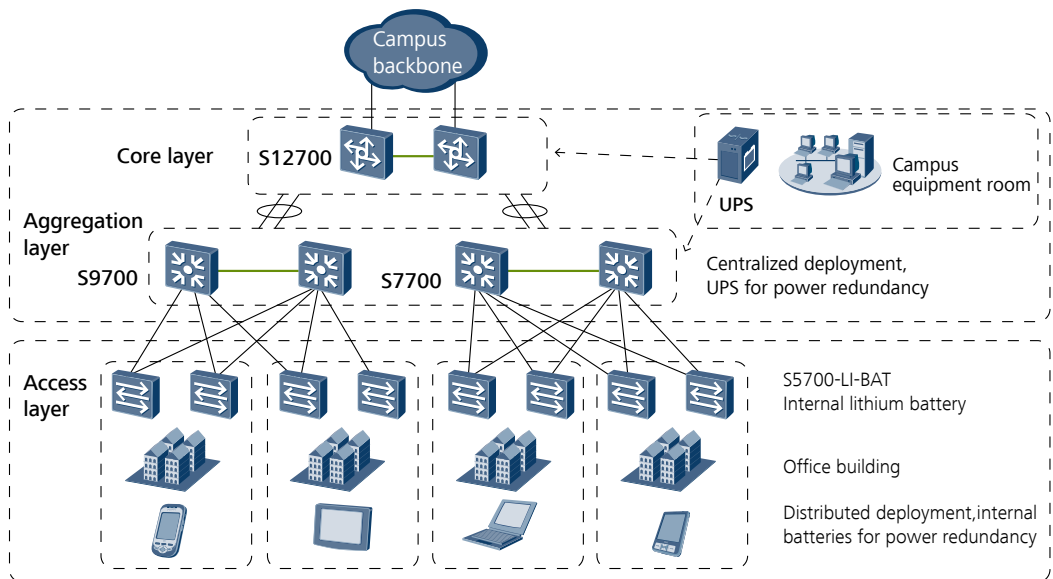

Product List

Product Description
S5700-10P-LI-AC (8x10/100/1000Base-T Ethernet ports, 2xGE SFP ports, AC power supply)
S5700-28P-LI-AC (24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, AC power supply)
S5700-28X-LI-AC (24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply)
S5700-28X-LI-DC (24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, DC power supply)
S5700-52P-LI-AC (48x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, AC power supply)
S5700-52X-LI-AC (48x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply)
S5700-10P-PWR-LI-AC (8x10/100/1000Base-T Ethernet ports, 2xGE SFP ports, PoE+, AC power supply)
S5700-28P-PWR-LI-AC (24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, PoE+, AC power supply)
S5700-28X-PWR-LI-AC (24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, PoE+, AC power supply)
S5700-52P-PWR-LI-AC (48x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, PoE+, AC power supply)
S5700-52X-PWR-LI-AC (48x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, PoE+, AC power supply)
S5700-28X-LI-24S-AC (24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply)
S5700-28X-LI-24S-DC (24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, DC power supply)
S5700-28P-LI-BAT (24x10/100/1000Base-T Ethernet ports, 4xGE SFP ports, 1 battery slot, AC power supply)
S5700-28P-LI-24S-BAT (28xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 1 battery slot, AC power supply)
S5700-52X-LI-48CS-AC (48xGE CSFP ports or 24xGE SFP ports, 4xCombo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply, front power sockets, front access)
S5701-28X-LI-AC (24x10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply, front power sockets, front access)
S5701-28X-LI-24S-AC (24xGE SFP ports, four Combo 10/100/1000Base-T Ethernet ports, 4x10GE SFP+ ports, AC power supply, front power sockets, front access)
S5700-28TP-LI-AC(24 Ethernet 10/100/1000ports,2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP,AC 110/220V)
S5700-28TP-PWR-LI-AC(24 Ethernet 10/100/1000 PoE+ ports,2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP,AC 110/220V)
S5701-28TP-PWR-LI-AC(12 Ethernet 10/100/1000 PoE+ ports,12 Ethernet 10/100/1000 ports,2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP,AC)
100/1000BASE-BIDI CSFP single-fiber bidirectional optical module-CSFP-GE/FE-single-mode optical module (Tx1490/Rx1310nm,10km,LC)
RPS1800 Redundant Power System
BAT-4AHA (chargeable lithium battery)
PBB-12AHA (12AH lead-acid battery charger module)
CBTS3400 (temperature sensor, used for temperature compensation when the lead-acid battery is charged)
150 W AC power module (optional for battery LAN switches, used as the redundancy for the internal power module)
150 W DC power module (optional for battery LAN switches, used as the redundancy for the internal power module)

For more information, visit <http://e.huawei.com/en> or contact your local Huawei sales office.

Copyright © Huawei Technologies Co., Ltd. 2016. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice



HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd.

Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.
Huawei Industrial Base
Bantian Longgang
Shenzhen 518129,P.R.China
Tel: +86 755 28780808

www.huawei.com